



INSTALLATION INSTRUCTIONS

Charge Speed Enhancer for the Yamaha Rhino® PN 4240

Parts Included:

- 1 - Charge Speed Enhancer
- 1 - Mounting Strip

Tool Required:

- 10mm Wrench

IMPORTANT

This product will increase the top speed of your Yamaha Rhino. Doing so will increase the risk of the vehicle turning over if sharp maneuvers are made. Serious injury or death can result. Always wear a helmet and use the seatbelts provided. By installing this product, anyone either using or exposed to its use assumes all real or implied risks pertaining to the product's enabling features and/or performance. In no event shall MSD Ignition nor any of its business components be liable for special or consequential damages.

WARNING: During installation, disconnect the battery cables. When disconnecting the battery, always remove the negative cable first and install it last.

1. Remove the battery cover and disconnect the battery to access the ECU.
2. Locate the ECU inside the battery box.
3. Remove the 10mm bolt that secures the ECU in place and remove the unit to access the connectors.
4. Locate and disconnect the 8-Pin and 6-Pin connectors and connect the MSD harness between the ECU and the factory harness.
5. Position the Charge on top of the battery. Pull the battery retaining strap over the unit to hold it and the battery in place (Figure 2).
6. Reinstall the ECU, connect the battery terminals and battery cover.
7. Have fun!

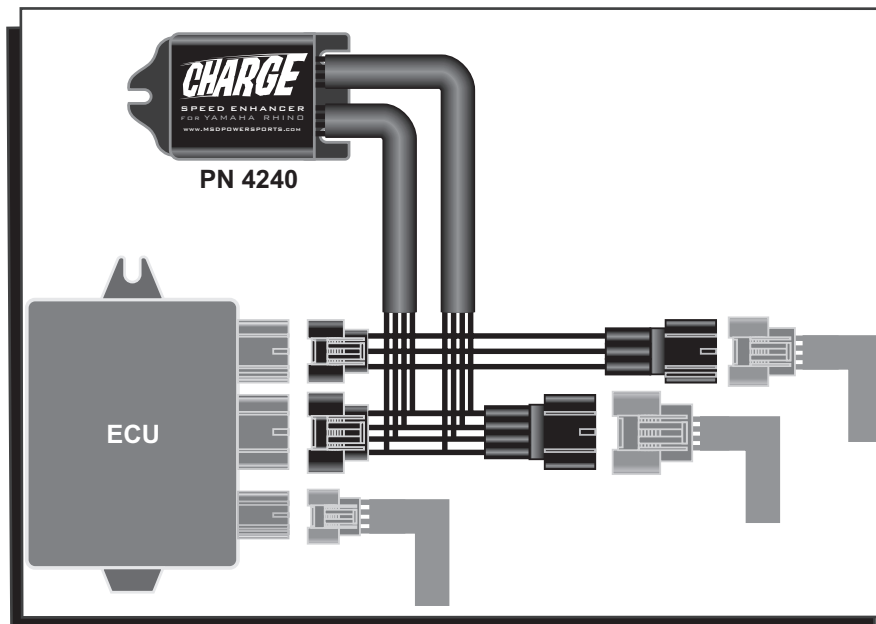


Figure 1 Connecting the MSD Charge.

Rhino is a Registered Trademark of Yamaha.



Figure 2 Mounting the MSD Charge.

Service

In case of malfunction, this MSD component will be repaired free of charge according to the terms of the warranty. When returning MSD components for warranty service, **Proof of Purchase** must be supplied for verification. After the warranty period has expired, repair service is based on a minimum and maximum fee.

All returns must have a Return Material Authorization (RMA) number issued to them before being returned. To obtain an RMA number please contact MSD Customer Service at 1 (888) MSD-7859 or visit our website at www.msdpower.com/rma to automatically obtain a number and shipping information.

When returning the unit for repair, leave all wires at the length in which you have them installed. Be sure to include a detailed account of any problems experienced, and what components and accessories are installed on the vehicle. The repaired unit will be returned as soon as possible using Ground shipping methods (ground shipping is covered by warranty). For more information, call MSD at (915) 855-7123. MSD technicians are available from 7:00 a.m. to 5:00 p.m. Monday - Friday (mountain time).

Limited Warranty

MSD warrants this product to be free from defects in material and workmanship under its intended normal use*, when properly installed and purchased from an authorized MSD dealer, for a period of one year from the date of the original purchase. This warranty is void for any products purchased through auction websites. If found to be defective as mentioned above, it will be repaired or replaced at the option of MSD. Any item that is covered under this warranty will be returned free of charge using Ground shipping methods.

This shall constitute the sole remedy of the purchaser and the sole liability of MSD. To the extent permitted by law, the foregoing is exclusive and in lieu of all other warranties or representation whether expressed or implied, including any implied warranty of merchantability or fitness. In no event shall MSD or its suppliers be liable for special or consequential damages.

*Intended normal use means that this item is being used as was originally intended and for the original application as sold by MSD. Any modifications to this item or if it is used on an application other than what MSD markets the product, the warranty will be void. It is the sole responsibility of the customer to determine that this item will work for the application they are intending. MSD will accept no liability for custom applications.