




INSTALLATION INSTRUCTIONS

EZ TRIGGER

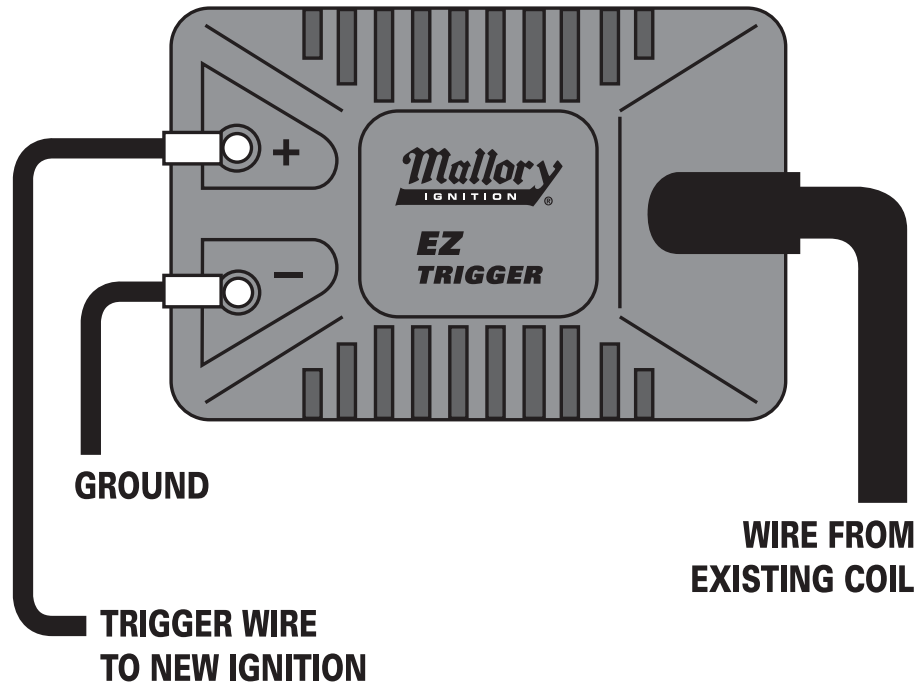

EZ TRIGGER ALLOWS THE STOCK COIL TO SEND ALL NECESSARY INFORMATION TO THE VEHICLE'S ECU.

STEP 1

Locate a convenient position for the EZ Trigger away from any high heat source such as the exhaust. Mount the EZ Trigger using the supplied screw or equivalent.

STEP 2

Leave all existing wiring in place on the stock coil, except route the coil wire to the coil tower on the new EZ Trigger instead of the distributor.

STEP 3

Connect the trigger wire for your Mallory HyFire Ignition or other aftermarket ignition to the "+" terminal on the EZ Trigger.

STEP 4

Connect the "-" terminal to ground.

STEP 5

Connect the balance of the ignition wiring as called out in the ignition's instructions. Install your second coil as instructed and route its coil wire to the distributor.

STEP 6

Recheck all connections before starting the engine.



MALLORY IS A DIVISION OF THE MR. GASKET PERFORMANCE GROUP
10601 MEMPHIS AVE. #12, CLEVELAND, OH 44144
216.688.8300 FAX 216.688.8306

FORM 1612
05/04
Made in U.S.A.
Printed in U.S.A.